




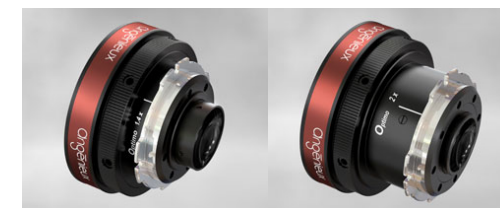
Optimized optical quality with low chromatic aberration, telecentricity and low distortion, ideal for high performance S35 digital cameras.
 Internal focus with minimal breathing.
 Image circle of 31.4mm diagonal for perfect illumination of the S35 sensors.
 Very robust and precise zoom and focus mechanics with Angénieux unique rod guiding system design.
 Precise focus marks with easily interchangeable focus scale ring from feet to meters.
 Integrated filter holder for standard screw in filters.
 Integrated net holder.
 Optional front protective glass.
 Designed for easy maintenance.
 / technology metadata interface*
 Standard PL mount lens. Panavision, Canon EF or Nikon F mounts optional

* / is a registered trademark of Cooke Optics Limited.

Zoom Ratio 10x
Focal Length F = 25 mm to 250 mm
Aperture : f/3.2 - T3.5
MOD : 1.22 m (4 feet)
Internal Focus : Yes
Image Coverage S 35+ : 31.4mm diagonal
Weight : 7.3 kg (16 lbs)
Length (Front to Mount) : 377.4 mm (PL),
 372.3 mm (Panavision)
Front Diameter : 136 mm

Available accessories :

Extender 1.4x
 & Extender 2x



FOV for 27.65 x 13.82 mm		
FOCAL LENGHT	25 mm	250 mm
HORIZONTAL ANGULAR FIELD OF VIEW	58.8°	6.24°
OBJECT DIMENSIONS AT MOD (mm)	486x1010	50.4x98