




FSB 8 Fluid head



Quality for (H)DV-Users: The FSB 8. The sturdy and reliable FSB 8 completes Sachtler's FSB-Range of 75mm heads, extending the payload range to 19.8 lbs (9 kg), well suited for (H)DV camcorders in industrial, newsgathering and education applications. The FSB 8 provides a 10-stage counterbalance, as well as five steps of drag (plus 0) for both tilt and pan. The fluid head is engineered with Sachtler's well-known technology, including its patented counterbalance switch mechanism, Speedbalance and Sideload technology, which allows quick mounting and unmounting of the camcorder for on-the-go assignments.

Technical Facts

Weight	2.15 kg / 4.7 lbs
Payload	1 - 9 kg / 2 - 20 lbs
Sliding range - plate	120 mm / 4.7"
Counterbalance	in 10 steps
Grades of drag	5 each horizontal and vertical + 0
Tilt range	+90/-75°
Temperature range	-40° to +60° C / -40 to +140° F
Camera fitting	Sideload plate S
Tripod/Pedestal fitting	75 mm bowl, integrated flat base fitting
Pan bar(s)	1, Type DV 75
Level	self-illuminating Touch Bubble
Batteries Level	1 x CR2032

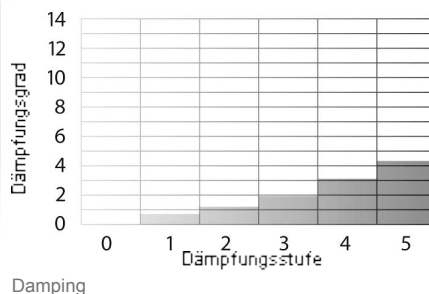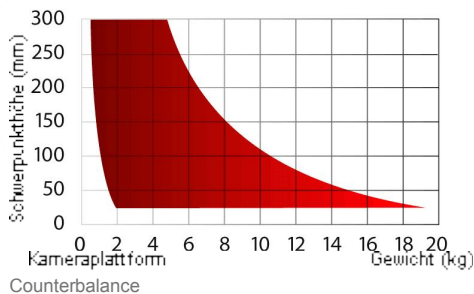

Dimensions

Further photos



Order data

Article	Order code
FSB 8 Fluid head	0707

This product is also available in the following systems:

Article	Order code
SOOM FSB 8 System	0760
System FSB 8	0770
System FSB 8 / 2 D	0771
System FSB 8 MD	0772
System FSB 8 / 2 MD	0773
System FSB 8 SL MCF	0775
System FSB 8 PowerSet	0770Bxxx
System FSB 8 / 2 D PowerSet	0771Bxxx
System FSB 8 MD PowerSet	0772Bxxx
System FSB 8 / 2 MD PowerSet	0773Bxxx
System FSB 8 SL MCF PowerSet	0775Bxxx

Accessories



Adapter 75/100



Pan bar DV right
(telescopic)



Pan bar DV left
(telescopic)



Adapter block
FSB 6 / 8



Accessory
adapter



Accessory
adapter with
clamping



FSB CELL



FSB
CELLCharger



Cable Adapter
FSB CELL Sony
I



Cable Adapter
FSB CELL Sony
II



Cable Adapter
FSB CELL
Canon



Cable Adapter
FSB CELL
Panasonic

set your ideas in motion!