



Rembrandt 1,2/2,5 kW

The NEW technology in discharge Daylight Fixtures

Patent Pending



NEW REMBRANDT 1,2-2,5 KW DAYLIGHT FRESNEL

CONSTRUCTION:

- Fixture housing in STAINLESS STEEL (INOX).

FINISHING:

- SAND BLASTED AND CHEMICALLY TREATED MATT STAINLESS STEEL (INOX).

PROTECTION FACTOR:

- IP 23, allowing the use of the fixture during moderate rain.

DISCHARGE LAMP TYPES:


- Single ended Hot Re-strike either 1,2 kW or 2,5 kW discharge lamps

DOUBLE POWER

- QUICK ACTION TOOL FREE lamp holder mechanism to set the fixture for either 1,2 or 2,5 kW lamp use.

INNOVATIVE PATENT PENDING IGNITER SYSTEM:

- TWO STAGE IGNITER, eliminating the need of HIGH VOLTAGE isolated movable internal cable.
- SILENT operation of the IGNITER also in FLICKER FREE mode.

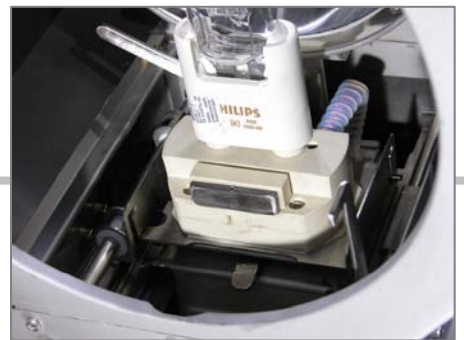

WEIGHT:

- 14,3 Kg.

MOD. 2522

ACCESSORIES & OPTIONALS

<p>Mod. 327.200 (+Mod. 327.210) 21.7" x 17.9" 3.3 lbs.</p>	<p>Mod. 329.100 Dia. 12" 0.7 lbs.</p>	<p>Mod. 327.100 Dia. 12" 0.6 lbs.</p>	<p>Mod. 326.110 Dia. 12.4" 3.1 lbs.</p>	<p>Mod. 326.210 Dia. 12.4" 3.6 lbs.</p>	<p>Mod. 328.100 Dia. 12.4" 4.4 lbs.</p>
			<p>Extension Cables 25' Mod. 2021.100 7.3 lbs. 50' Mod. 2021.200 14.6 lbs.</p>		<p>Mod. 329.250 0.4 lbs.</p>

