

ROMY Accessories

	The dichroic filter mounts easily to any ROMY light.	139876
	The 4 leaf barndoor allows for a wide range of lighting design.	139875
	The adapter cables convert an A/B socket to a XLR plug or a XLR socket to an A/B plug.	149036 149037
	The ROMY ball joint allows the on-board light to achieve maximum mobility in any direction.	156642
	Bulbs GY 6.35, Halogen 20 W GY 6.35, Halogen 35 W GY 6.35, Halogen 50 W GY 6.35, Halogen 75 W GY 6.35, Halogen 100 W	139877 139888 139878 139879 155807
	With the 75 W housing modification kit , all non-dimmable ROMY and Reporter 50 lights can be retrofitted to dimmer versions.	
	XLR version A/B version	140253 141969
	The handgrip for all ROMY lights. With 16 mm spigot, 3/8" and 1/4" holes.	155271

Additional accessories for ROMY lights can be found in the Panther Broadcast Accessories catalogue. Subject to technical modifications.

Flyer ROMY Lights | E | 05.2007



- focusable
- lightweight
- cool to the touch
- compact design
- shatter-proof body
- high light output



20 | 50 W



75 W



100 W

Panther Broadcast offers a series of small and extremely light camera lights.

All lights have a working voltage of 10,5 - 16 V (ROMY 100/12 V) and are focusable. They may be powered either directly off the camera, from an external battery, or from the mains transformer. ROMY 75 and ROMY 100 lights are dimmable. All lights are supplied with an integrated diffusion filter and either a 4-pin XLR plug or an A/B plug. A complete line of accessories allows for use in a wide variety of applications.

ROMY Lights

Tiny, lightweight, excellent value.

PANTHER GmbH
Raiffeisenallee 3 | 82041 Oberhaching-Munich | Germany
T +49.89.61 39 00 01 | F +49.89.61 31 00 0
contact@panther.tv | www.panther.tv



The ROMY Product Range at a Glance

ROMY_lights

ROMY 20|50



- A perfect introduction to the ROMY line
- Extremely lightweight design
- Excellent price-performance ratio

code no. 139871 (XLR)*
code no. 139872 (A/B)*

ROMY 75



- Internal dimmer with deep discharge protection
- Separate on | off switch
- Wide input voltage range between 10.5 and 16 V

code no. 139873 (XLR)*
code no. 139874 (A/B)*

ROMY 100




- High light output
- Mains power supply with dimmable transformer between 0 and 100 %
- Versatile and easy to use on location

code no. 155792*

* 4 leaf barndoor and daylight filters not included

ROMY_100 Set Light

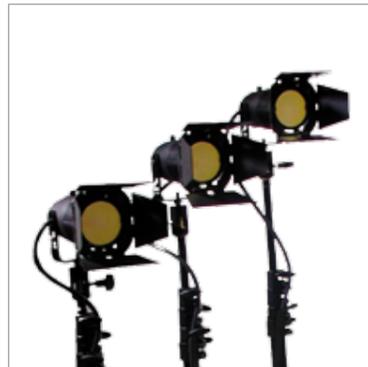

The ROMY 100 light set puts a new, extremely compact location light at your disposal.

As the smallest and lightest location light kit on the market, its three 100 W lights provide the right illumination for small sets. It's a fast and inexpensive solution for lighting interviews, close-ups and pack shots. The 4 leaf barndoor and three provided gel filters are just what you need for small studio productions.

The entire kit may be stored in a padded bag for convenience and easy access. Fully loaded, it weighs only 21 lb | 9.5 kg.



ROMY 100 Set Light | code no. 155808



With 4-pin XLR



With A/B plug

ROMY technical data

Specifications

Weight:	aprox. 9.4 oz 265 g
Size:	4.3 x 3.9 x 2.4" 110 x 98 x 60 mm
Bulb:	Halogen, 20, 35 and 50 W for all ROMY lights, 75 W for ROMY 75 and 100 W only for ROMY 100
Bulb base:	GY 6.35
Cable:	2.1 ft 0.65 m (A/B versions) 4.9 ft 1.5 m (XLR versions)
Voltage:	AC DC 10.5 – 16V (ROMY 20 50) DC 10.5 – 16V (ROMY 75) AC 230V, AC DC 12V (ROMY 100)
Material:	heat resistant synthetic material reinforced with carbon fibre

ROMY Battery System

13.2 V | 9.5 Ah with built-in charger

- With ROMY 75 aprox. 1h 30min. running time
- Charging time: max. 5 hours
- Mains input between 90 and 250 V | AC, 50-60 Hz
- Deep discharge protection with LED Display
- Lightweight: 6.4 lb | 2.9 kg
- Two 4-pin XLR outputs with short circuit-protection and jump fuse
- HF built-in charger with micro processor control
- Stable output voltage and stable colour temperature during entire running time



code no. 139868



ROMY 75 with 4 leaf barndoor