




Windows XP™

Connection Diagrams

DeckLink™

SD-SDI 4:2:2 video and audio, capture and playback card




Deck Control
RS-422

AES-S/PDIF
Output

SD-SDI 4:2:2
Monitoring Output

SD-SDI 4:2:2
Output (to deck)

SD-SDI 4:2:2
Input (from deck)

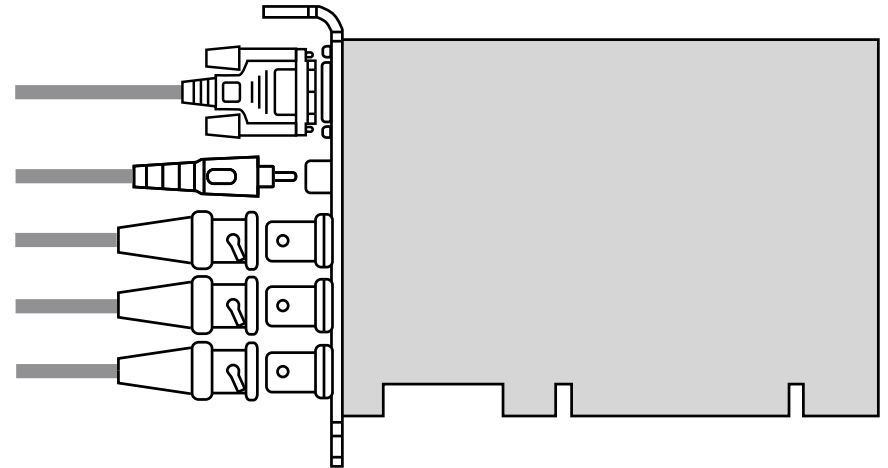

This DeckLink model does not have genlock, so you need to connect your deck to the Deck SDI Output, which has stable output to sync the deck. Set the deck to input or auto reference. Be sure to set the “Black Video Output to Deck in Capture” option to “On Digital SDI Outputs” in the DeckLink control panel, when using this feature.